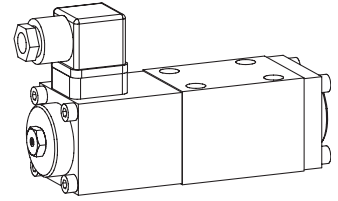


Solenoid operated spool valve

- 4/2-way impulse valve, detented
- 4/3-way with spring centred mid position
- 4/2-way with spring reset
- $Q_{max} = 30 \text{ l/min}$, $p_{max} = 250 \text{ bar}$

NG6
ISO 4401-03


DESCRIPTION

Spool valve in flange design NG6, interface to ISO 4401-03 with 4 ports. Solenoid to standard VDE 0580. Direct operated solenoid valve in 5 chamber design. Spool detented or with spring reset. Wet pin type solenoid. Precise spool fit, low leakage, long life time. Threaded ports through additional base plate. Spool made from hardened steel, body from high quality cast steel. Wide range of standard and special voltages. The valve body is painted, end cover and solenoid are zinc coated.

FUNCTION

The solenoid shifts the spool into the corresponding position.

- 4/2-way detented spool valve:
2 solenoids and 2 detented positions. With the solenoids deenergised the spool remains in the last switched position.
- 4/2-way spool valve:
1 solenoid and 2 spool positions, spring offset. With the solenoid deenergised the spool returns to the offset position.
- 4/3-way spool valve:
2 solenoids and 3 spool positions, spring centered. With the solenoids deenergised the spool returns to the center position.

APPLICATION

Solenoid operated spool valves are mainly used for controlling direction of movement and stopping of hydraulic cylinders and motors. Direction of movement depends on the position of spool and its flow symbol. Please pay attention to the performance limits and leakage of the valves. Solenoid operated spool valves are suitable for machine tools and handling systems.

CONTENT

GENERAL SPECIFICATIONS	1
HYDRAULIC SPECIFICATIONS	1
ELECTRICAL CONTROL	2
SOLENOID DESCRIPTION	2
TYPE LIST/ DESIGNATIONS OF SYMBOLS	2
CHARACTERISTICS	2/3
DIMENSIONS	3
PARTS LIST	3
ACCESSORIES	3

TYPE CODE

	A	M	4	□	-	□	#	□
International standard interface ISO								
Solenoid S/N45V								
Number of control ports								
Description of symbols acc. to table 1.2-57/2								
Standard-nominal voltage U_N :	12 VDC	<input type="checkbox"/>	G12					
	24 VDC	<input type="checkbox"/>	G24					
	110 VAC	<input type="checkbox"/>	R110					
	115 VAC	<input type="checkbox"/>	R115					
	230 VAC	<input type="checkbox"/>	R230					
Design-Index (Subject to change)								

GENERAL SPECIFICATIONS

Description	4/2-, 4/3-way spool valve
Nominal size	NG6 to ISO 4401-03
Construction	Direct operated spool valve
Operating method	Solenoid
Mounting	Flange 4 fixing holes for socket head cap screws M5x45
Connections	Threaded connection plates Multi-flange subplates Longitudinal stacking system
Ambient temperature	-20...+50°C
Mounting position	any, preferably horizontal
Fastening torque	$M_D = 5,5 \text{ Nm}$ (screw quality 8.8)
Weight: 4/2-way impuls	$m = 2,5 \text{ kg}$
4/3-way	$m = 2,5 \text{ kg}$
4/2-way (1 solenoid)	$m = 1,8 \text{ kg}$

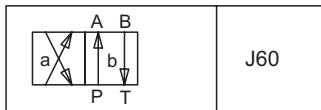
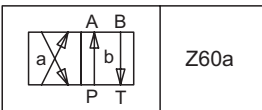
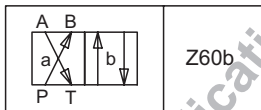
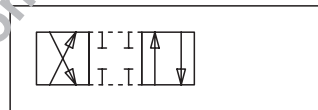
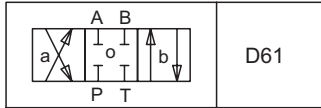
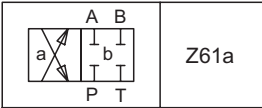
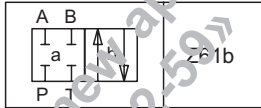
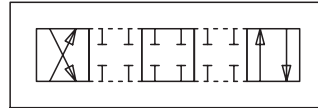
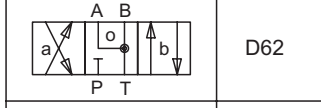
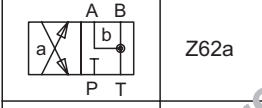
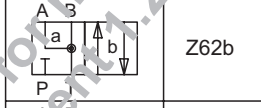
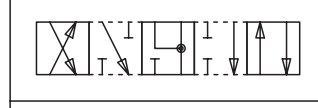
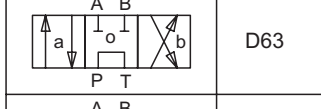
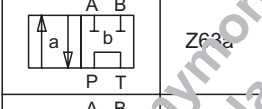
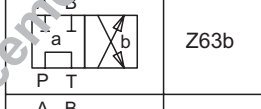
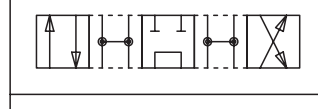
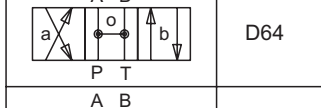
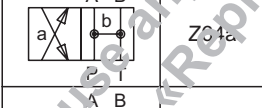
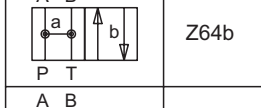
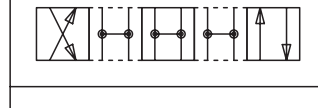
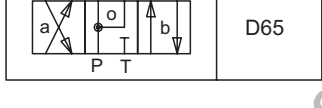
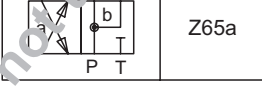
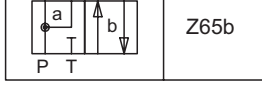
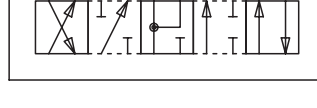
HYDRAULIC SPECIFICATIONS

Hydraulic medium	Mineral oil, other fluid on request
Contamination efficiency	ISO 4406:1999, class 20/18/14 (Required filtration grade $\beta_{10...16} \geq 75$) refer to data sheet 1.0-50/2
Viscosity range	12 mm ² /s...320 mm ² /s
Fluid temperature	-20...+70°C
Working pressure	
in port P, A, B	$p_{max} = 250 \text{ bar}$
Tank pressure	
in port T	$p_{max} = 160 \text{ bar}$
Max. volume flow	$Q_{max} = 30 \text{ l/min}$
Leakage volume flow	see characteristics

ELECTRICAL CONTROL

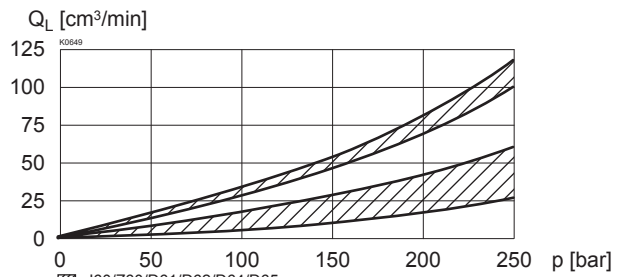
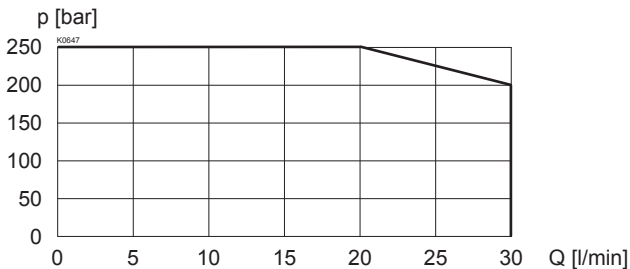
Construction	Solenoid, wet pin push type, pressure tight	Voltage tolerance	±10% of nominal voltage
Standard-nominal voltage	$U_N = 12$ VDC	Protection class	IP 65 to EN 60 529
	$U_N = 24$ VDC	Relative duty factor	100% DF (see data sheet 1.1-430)
	$U_N = 110$ VAC*	Switching cycles	15000/h
	$U_N = 115$ VAC*	Operating life	10^7 (number of switching cycles, theoretically)
	$U_N = 230$ VAC*	Connection/Power supply	Over device plug connection to ISO 4400/DIN 43650, (2P+E), other connections on request.
	AC = 50 to 60 Hz	Solenoid version:	SIN45V (data sheet 1.1-120)
	* Rectifier integrated in the plug.		
	Other nominal voltages and nominal performances on request.		

TYPE LIST / DESIGNATION OF SYMBOLS

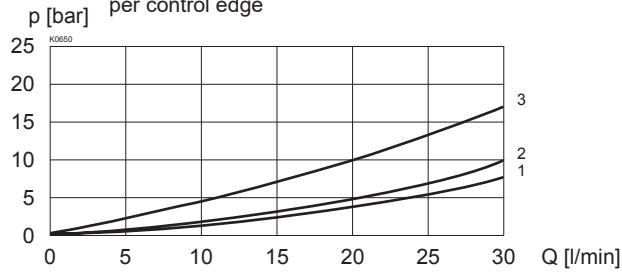
4/2-way valve impulse	4/2-way valve with spring reset operation A-side	operation B-side	Transitional functions
 J60	 Z60a	 Z60b	
4/3-way valve spring centered			
 D61	 Z61a	 Z61b	
 D62	 Z62a	 Z62b	
 D63	 Z63a	 Z63b	
 D64	 Z64a	 Z64b	
 D65	 Z65a	 Z65b	

CHARACTERISTICS Oil viscosity $\nu = 30$ mm²/s

 $p = f(Q)$ Performance limits with standard voltage -10%

 $Q_L = f(p)$ Leakage volume flow characteristics per control edge


$\Delta p = f(Q)$ Pressure drop volume flow characteristics per control edge

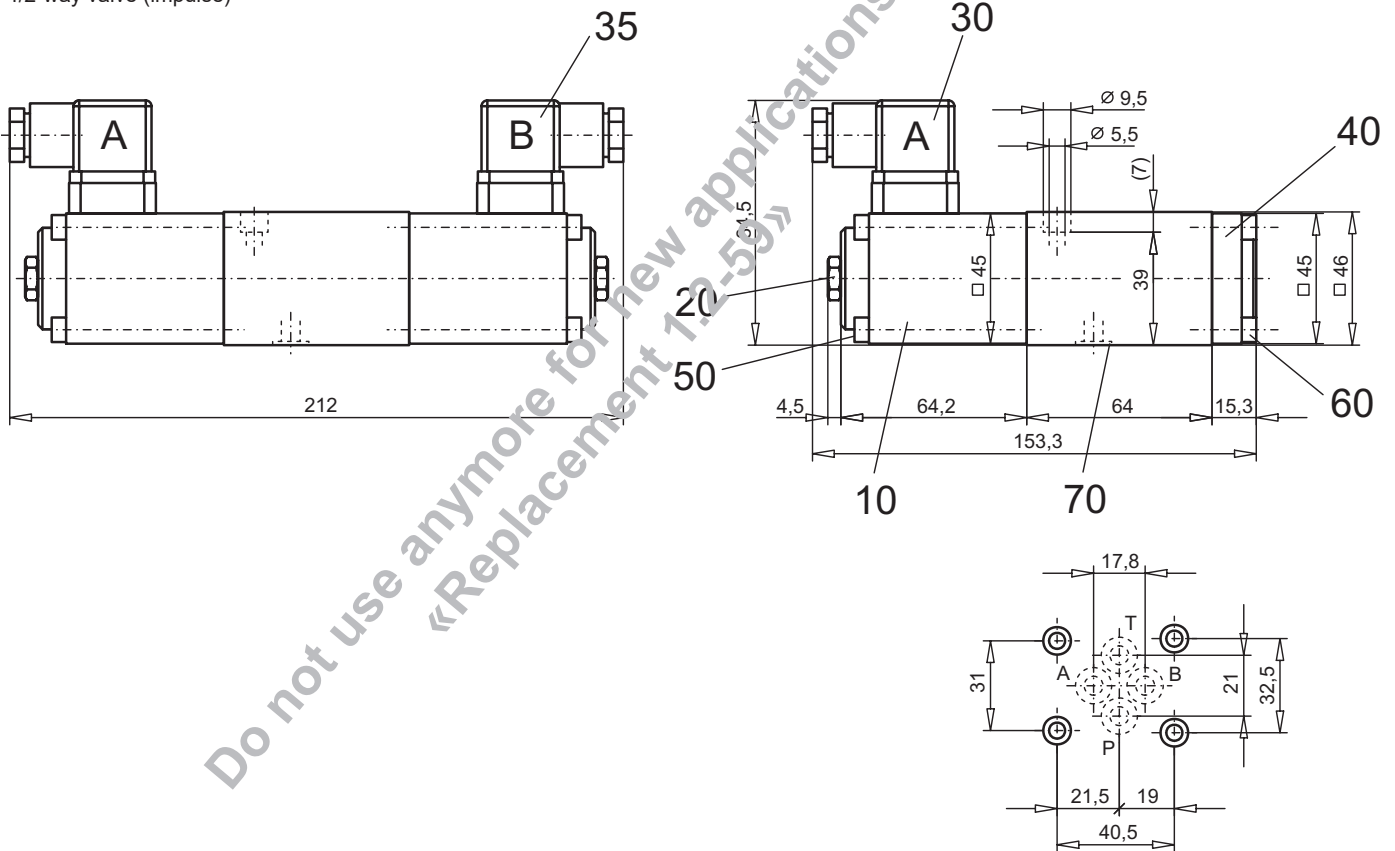


Pressure drop Curve No.	Volume flow direction				
	P - A	P - B	P - T	A - T	B - T
Z60/J60	2	2	-	2	2
D61/Z61	2	2	-	2	2
D62/Z62	2	2	-	2	2
D63/Z63	2	2	3	2	2
D64/Z64	1	1	-	1	1
D65/Z65	1	1	-	2	2

DIMENSIONS

4/3-way valve (spring centered)
 4/2-way valve (impulse)

4/2-way valve (spring reset)


PARTS LIST

Position	Article	Description
10	260.6 ...	Solenoid SIN45V
20	253.8001	Plug with integrated manual override HB6
30	219.2001	Electric plug A (grey)
35	219.2002	Electric plug B (black)
40	58.4200	Cover
50	246.2160	Socket head cap screw M5x60 DIN 912
60	246.1117	Socket head cap screw M5x16 DIN 912
70	160.2093	O-ring ID 9,25x1,78

ACCESSORIES

Threaded connecting plates, Multi-flange subplates and Longitudinal stacking system see Reg. 2.9

Technical explanation see data sheet 1.0-100