


## Proportional pressure reducing cartridge

- ◆ direct operated by means of pilot spool
- ◆  $Q_{\max} = 20 \text{ l/min}$
- ◆  $p_{\max} = 350 \text{ bar}$
- ◆  $p_{N \text{ red max}} = 200 \text{ bar}$

## DESCRIPTION

Direct operated proportional pressure reducing valve with pilot spool actuation in screw-in cartridge construction for cavity according to ISO 7789. Proportionally to the solenoid current, the solenoid force and the pressure in port A (1) rise. The valve functions practically independently of the pressure in port P (2). Pressure increase in the consumer port A (1) to above the adjusted value, e.g. through an active consumer, is avoided by discharging excess oil to the tank T (3). With the solenoid deenergised, the oil flows freely from consumer port A (1) to port T (3). For the control, Wandfluh proportional amplifiers are available (see register 1.13).


## SYMBOL



## STANDARDS

Cartridge cavity	ISO 7789
Solenoids	DIN VDE 0580
Connection execution D	EN 175301 – 803
Protection class	EN 60 529
Contamination efficiency	ISO 4406

**M22 x 1,5**  
**ISO 7789**

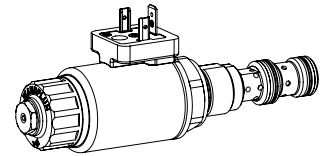

## APPLICATION

These valves are used in hydraulic systems where the pressure has to be changed frequently. The electrical remote control in conjunction with process controls allows economical solutions with repeatable processes. The screw-in cartridge is perfectly suitable for installation in control blocks and is installed in sandwich- (vertical stacked systems) and in flange plates (corresponding data sheets in this register). Direct operated pressure reducing valves are used where a low minimal adjustable pressure is required. For machining the cartridge cavity in steel and aluminum blocks, cavity tools are available (hire or purchase). Please refer to the data sheets in register 2.13.

## ACTUATION

Actuation	Proportional solenoid, wet pin push type, pressure tight
Execution	W.S37 / 19 x 50 (Data sheet 1.1-173) M.S35 / 19 x 50 (Data sheet 1.1-174)
Connection	Connector socket EN 175301 – 803 Connector socket AMP Junior-Timer Connector Deutsch DT04 – 2P

## INSTALLATION NOTES

Mounting type	Screw-in cartridge M22 x 1,5
Mounting position	Any, preferably horizontal
Tightening torque	$M_D = 60 \text{ Nm}$ Screw-in cartridge $M_D = 5 \text{ Nm}$ knurled nut $M_D = 9,5 \text{ Nm}$ HB0 $M_D = 5,5 \text{ Nm}$ HB4,5

**TYPE CODE**

		M P P PM22 - <input type="text"/> - <input type="text"/> / <input type="text"/> <input type="text"/> - <input type="text"/> <input type="text"/> #			
Pressure reducing valve					
Direct operated by means of pilot spool					
Proportional					
Screw-in cartridge M22 x 1,5					
Nominal pressure range $p_{N\text{ red}}$	20 bar	<input type="text" value="20"/>	115 bar	<input type="text" value="115"/>	
	80 bar	<input type="text" value="80"/>	200 bar	<input type="text" value="200"/>	
Nominal voltage $U_N$	12 VDC	<input type="text" value="G12"/>	24 VDC	<input type="text" value="G24"/>	
	without coil	<input type="text" value="X5"/>			
Slip-on coil	Metal housing round			<input type="text" value="W"/>	
	Metal housing square			<input type="text" value="M"/>	
Connection execution	Connector socket EN 175301 - 803 / ISO 4400			<input type="text" value="D"/>	
	Connector socket AMP Junior - Timer			<input type="text" value="J"/>	
	Connector Deutsch DT04 - 2P			<input type="text" value="G"/>	
Sealing material	NBR			<input type="text"/>	
	FKM (Viton)			<input type="text" value="D1"/>	
Manual override	standard			<input type="text" value="HB4,5"/>	
	without, with screw plug			<input type="text" value="HBO"/>	

Design index (subject to change)

2.3-625

**GENERAL SPECIFICATIONS**

Designation	Proportional pressure reducing valve
Construction	Direct operated by means of pilot spool
Mounting	Screw-in cartridge construction
Nominal size	M22 x 1,5 according to ISO 7789
Actuation	Proportional solenoid
Ambient temperature	-25...+70 °C
Weight	0,55 kg
MTTFd	150 years

**ELECTRICAL SPECIFICATIONS**




Protection class	Connection execution D: IP65 Connection execution J: IP66 Connection execution G: IP67 and IP69K
Relative duty factor	100 % DF
Standard nominal voltage	12 VDC, 24 VDC
Limiting current at 50 °C	$I_G = 1360 \text{ mA}$ ( $U_N = 12\text{VDC}$ ) $I_G = 680 \text{ mA}$ ( $U_N = 24\text{VDC}$ )

**Note!** Other electrical specifications see data sheet 1.1-173 (slip-on coil W) and 1.1-174 (slip-on coil M)


**HYDRAULIC SPECIFICATIONS**

Working pressure	$p_{\text{max}} = 350 \text{ bar}$
Nominal pressure range	$P_{N\text{ red}} = 20, 80, 115, 200 \text{ bar}$
Minimum adjustable pressure	< 1 bar
Volume flow range	See characteristic
Leakage oil	at $p_{\text{sys}} = 350 \text{ bar}$ < 30 ml/min for $p_{N\text{ red}} = 20, 80, 115 \text{ bar}$ < 50 ml/min for $p_{N\text{ red}} = 200 \text{ bar}$
Hysteresis	≤ 4 % at optimal dither signal
Repeatability	≤ 1 % at optimal dither signal
Fluid	Mineral oil, other fluid on request
Viscosity range	12 mm <sup>2</sup> /s...320 mm <sup>2</sup> /s
Temperature range fluid	-20...+70 °C (NBR) -20...+70 °C (FKM)
Contamination efficiency	Class 18 / 16 / 13
Filtration	Required filtration grade $\beta_{6...10} \geq 75$ , see data sheet 1.0-50

**PERFORMANCE SPECIFICATIONS**

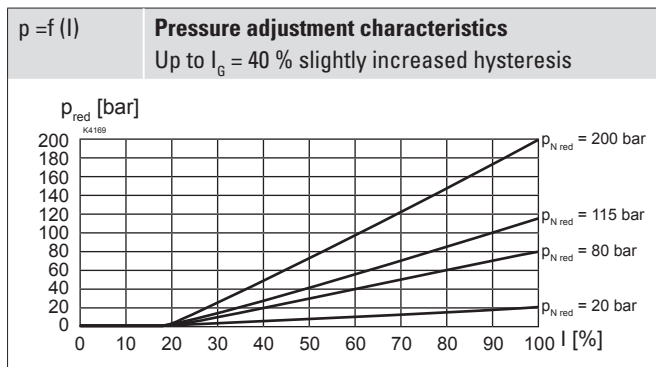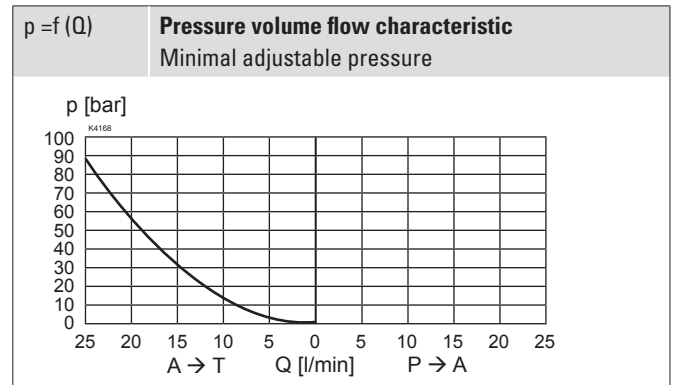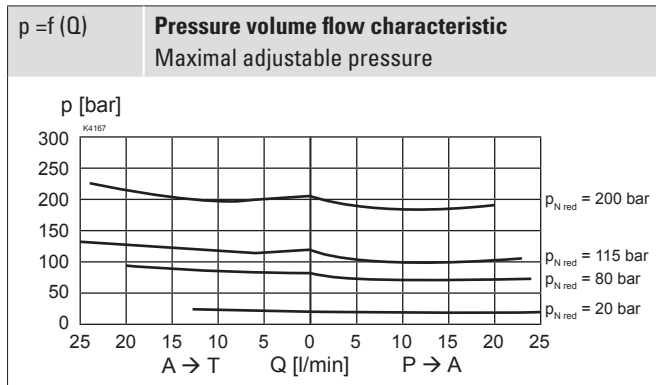 Oil viscosity  $\nu = 30 \text{ mm}^2/\text{s}$ 

**ACCESSORIES**

Proportional amplifier	Register 1.13
Electric plug B (black)	Article no. 219.2002
Technical explanations	Data sheet 1.0-100
Filtration	Data sheet 1.0-50

**MANUAL OVERRIDE**

Standard HB4,5

Optionally: Screw plug (HBO), no actuation possible.

**Attention!** If the manual override is actuated, the nominal pressure level may be exceeded.



**SURFACE TREATMENT**

- ◆ The cartridge body, the slip-on coil and the armature tube are zinc-nickel coated

**SEALING MATERIAL**


NBR or FKM (Viton) as standard, choice in the type code

## DIMENSIONS

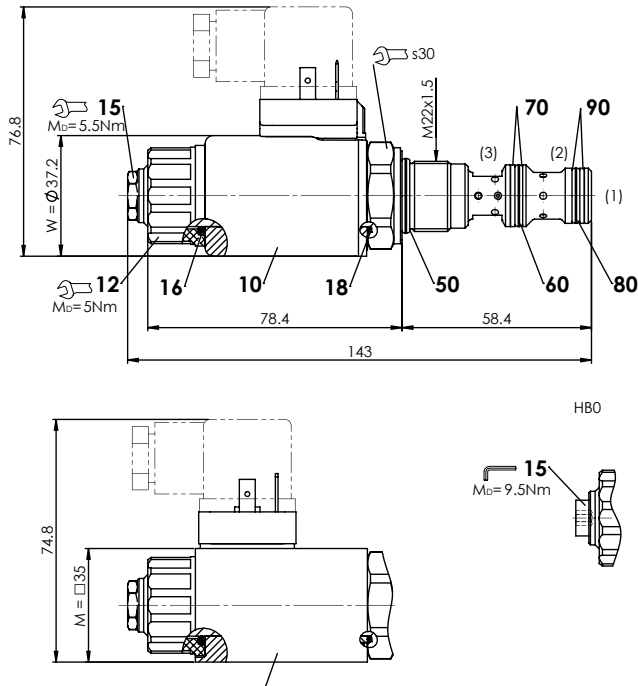

## HYDRAULIC CONNECTION

Cavity drawing according to ISO 7789-22-04-0-98

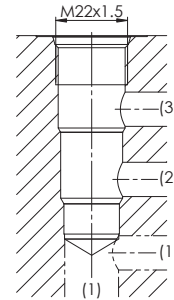

### Note!



For detailed cavity drawing and cavity tools see data sheet 2.13-1004

## PARTS LIST

Position	Article	Description
10	206.2...	W.S37 / 19 x 50
	260.5...	M.S35 / 19 x 50
12	154.2700	Knurled nut
15	253.8000	HB4,5 manual override
	239.2033	HBO Screw plug
	251.3106	Seal kit NBR
	251.3115	Seal kit D1

### Seal kit consisting of:

16	O-ring	ID 18,72 x 2,62
18	O-ring	ID 17,17 x 1,78
50	O-ring	ID 18,77 x 1,78
60	O-ring	ID 15,60 x 1,78
70	Back. ring	PTFE rd 16,1 x 19 x 1,4
80	O-ring	ID 14,00 x 1,78
90	Back. ring	PTFE rd 14,1 x 17 x 1,4